

EPOXI 1322 SD

MULTIFUNCTIONAL 100% SOLIDS EPOXY FOR FLOORINGS

FORMAT

Kit A+B: 18 kg

PROPERTIES

Solvent-free, 100% solids

Can be used as a paint, self-levelling and multi-layer coating

Smooth and anti-slip finish possible

High chemical resistance

Excellent adhesion on concrete

Waterproof after curing

High mechanical strength

Low odour



100%
SÓLIDOS



AUTONIVELANTE



GRAN
DUREZA



ALTA
ELASTICIDAD



RESISTENCIA
A LA ABRASIÓN



RESISTENCIA
QUÍMICA



BAJOS COV'S



SIN OLOR



CERTIFICADO
EN 13501-1

PRODUCT DESCRIPTION

Two-component, solvent-free epoxy paint, specially formulated for the protection and decoration of continuous concrete floors. It is a multifunctional product that can be used as a paint, self-levelling or in multi-layer systems. It can be applied as a self-levelling product in combination with 0.3 mm quartz sand, resulting in excellent levelling finishes up to 3 mm thick. It can be used in multi-layer systems with 0.6 mm quartz sand seeding to obtain high thickness and high resistance anti-slip floorings for use in process areas requiring cleaning by washing down.

USES/SCOPE OF APPLICATION

EPOXI 1322 SD should be used by professionals with experience in the application of floor coatings. It can be used as a smooth or anti-slip seal coat in medium or high traffic areas depending on the thickness applied and the selection of aggregates. Suitable for use in car parks, industrial buildings, workshops, warehouses, production areas, laboratories, shops, etc. The product is resistant to outdoor conditions, but its aesthetic properties may vary due to the effect of solar radiation (changes in colour and/or limescale), which does not affect the performance of the flooring.

REPORTS AND CERTIFICATES

Fire classification for floors Bfl-s1 according to EN 13501-1

VOC emissions certificate in compliance with A+, ABG, EMICODE, Indoor Air Comfort and BlueAngel standards (392-2024-00527501)

Certificate of compliance with Directive 2004/42/EC on maximum content of Volatile Organic Compounds in paints and varnishes.

SLIP RESISTANCE reports, according to the UNE-EN 16165:2022 standard (Reports EUP-ED16165-005 to EUP-ED16165-009).

Chemical Resistance Report according to EN 2812-3 and UNE EN ISO 4628 (Report EUP-RQ4628-002).

LEED v4 and v4.1 BETA Certificate of Compliance (Report 392-2024-00527501)

CHARACTERISTICS

Type of resin	Epoxy / Amine		
Presentation	Component A: 15 kg Component B: 3 kg Kit A+B: 18 kg	(EPOXY 1322 SD) (EPOXY CATALYST 1320 SD)	
Finishing	Brilliant		
Colour	WHITE RAL chart and other colours on request		
Mixing ratio	5 : 1 by weight (A:B)	3 : 1 in volume (A:B)	
Solids by Weight	100%		UNE-EN ISO 3251
Solids by volume	100%		UNE-EN ISO 23811
Dilution	Dilution is not recommended		
Diluent	Dilution is not recommended		

Note: To obtain homogeneous colours, use the same production batch.


TECHNICAL INFORMATION

Density	Mixture A + B : 1,51 ± 0,05 g/mL			UNE-EN ISO 2811-1	
Viscosity	Mixture A + B : 2 ± 1 Pa.s			ASTM D 2196-10	
Volatile organic compound (VOC) content	EU maximum permitted value: 500 g/L			Directive 2004/42/II A (j)	
Tensile adhesion	6 N/mm2 (concrete failure)			UNE-EN 1542	
Abrasion resistance	53 mg (CS17/1000/1000)			EN ISO 7784-1	
Impact resistance	ND			EN ISO 868	
Shore hardness D	76 (After 7 days)			EN ISO 868	
Chemical resistance	High resistance to liquid reagents. See technical report			UNE-EN ISO 2812-3 UNE-EN ISO 4628	
Slip resistance	Paint/Self-Leveling	RD = 20/22 (Class 1)		UNE-EN 16155	
	Anti-slip 35% fine aggregate	RD = 40 (Class 2)			
	Anti-slip 35% medium aggregate	RD = 49 (Class 3)			
	Anti-skid aggregate seeded	RD = 64 (Class 3)			
Lifetime	10°C	45 min	Shelf life for 1 kg of mixture A+B		
	20°C	30 min			
	30°C	15 min			
Drying time	10°C	9 h	UNE 48301 Dust drying		
	20°C	4 h			
	30°C	3 h			
Repainting time		Myself	Solvent-based products		
		min	max	min	max
	10°C	18 h	4 days	36 h	5 days
	20°C	6 h	2 days	18 h	3 days
	30°C	4 h	1 day	12 h	2 days
Transitability		Pedestrian Traffic	Light Traffic	Full cure	
	10°C	3 days	7 days	14 days	
	20°C	24 h	4 days	7 days	
	30°C	18 h	3 days	5 days	

Note: Times are approximate and may be modified by environmental conditions and thickness applied.


APPLICATION SYSTEMS

PAINTING

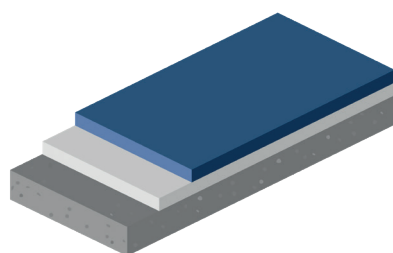


	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.3 kg/m ²	1 o 2	0.2-0.3 mm
FINISH	EPOXI 1322 SD	0.2-0.3 kg/m ²	1 o 2	0.1-0.2 mm
TOTAL		0.4-0.6 kg/m ²	2 o 3	0.3-0.5 mm

MIXED NON-SLIP

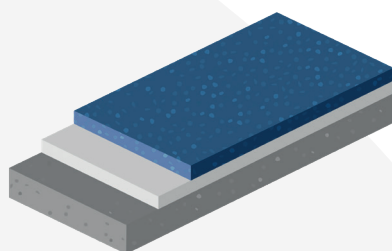

	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.3 kg/m ²	1 o 2	0.2-0.3 mm
FINISH	EPOXI 1322 SD + ARENA DE CUARZO 0.2-0.4 mm mezclados en proporción 1:0,25	0.2-0.3 kg/m ² of mixture	1 o 2	0.1-0.2 mm
TOTAL		0.4-0.6 kg/m ²	2 o 3	0.3-0.5 mm

ANTI-SLIP SEEDED

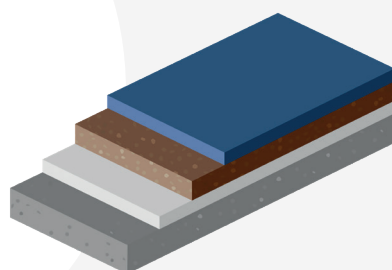

	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.5 kg/m ²	1 o 2	0.2-0.5 mm
SPOLVOREO	Arena de cuarzo 0,6 mm	2-3 kg/m ²	-	1-1.5 mm
SEALING	EPOXI 1322 SD	0.3-0.5 kg/m ²	1 o 2	0.2-0.4 mm
TOTAL		2.5-4.0 kg/m ²		1,4-2,4 mm

Note: These data are theoretical and do not take into account additional material costs due to porosity, roughness, losses, etc.


Note: For ease of maintenance it is recommended to use a final coat of protection with a clear varnish such as EPOXY VARNISH 1513 for indoor use or POLYURETHANE VARNISH 2113 for outdoor use.

Note: For outdoor application it is recommended to use a protective top coat with a coloured product with high resistance to solar radiation such as POLYURETHANE 2512.

Note: For application on concrete floors with moisture problems, use STEAM BARRIER 1331 SD as a primer.


APPLICATION SYSTEMS

SELF-LEVELLING UP TO 2MM

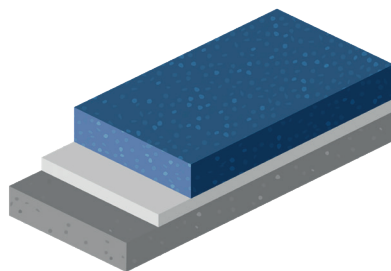


	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.3 kg/m ²	1 o 2	0.2-0.3 mm
FINISH	EPOXI 1322 SD + ARENA DE CUARZO 0,2-0,4 mm mezclados en proporción 1:0,5 (1 mm por cada 1,8 kg/m ²)	2-3 kg/m ² of mixture	1	1-2 mm
TOTAL		2.2-3.3 kg/m ²	2 o 3	1,2-2,3 mm

SELF-LEVELLING > 2MM

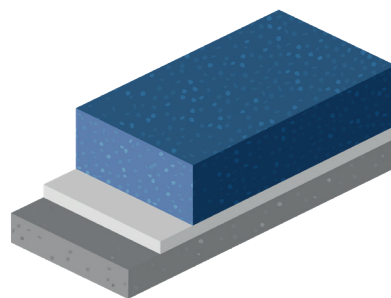

	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.3 kg/m ²	1 o 2	0.2-0.3 mm
FINISH	EPOXI 1322 SD + ARENA DE CUARZO 0,2-0,4 mm mezclados en proporción 1:1 (1 mm por cada 2 kg/m ²)	3-6 kg/m ² of mixture	1	2-3 mm
TOTAL		3.2-6.3 kg/m ²	2 o 3	2,2-3,3 mm

ANTI-SLIP MULTILAYER

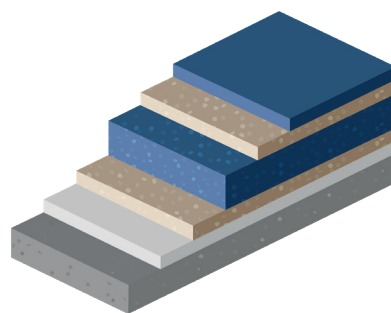

	PRODUCT	RDTO.	LAYERS	THICKNESS
PRIMING	EPOXI PRIMER 1311 SD	0.2-0.5 kg/m ²	1 o 2	0.2-0.5 mm
SPOLVOREO	Arena de cuarzo 0,6 mm	2-3 kg/m ²	-	1-1.5 mm
ROLLER LAYER	EPOXI 1322 SD + ARENA DE CUARZO 0,2-0,4 mm mezclados en proporción 1:0,5 (1 mm por cada 1,8 kg/m ²)	2-6 kg/m ² mix	1	1-3 mm
SPOLVOREO	Arena de cuarzo 0,6 mm	2-3 kg/m ²	-	1-1.5 mm
SEALING	EPOXI 1322 SD	0.5-0.7 kg/m ²	1 o 2	0.4-0.6 mm
TOTAL		6.7-13.2 kg/m ²	3 o 4	3,6-7,1 mm

Note: These data are theoretical and do not take into account additional material costs due to porosity, roughness, losses, etc.

Note: For outdoor application it is recommended to use a protective top coat with a coloured product with high resistance to solar radiation such as POLYURETHANE 2512.

Note: For ease of maintenance it is recommended to use a final coat of protection with a clear varnish such as EPOXY VARNISH 1513 for indoor use or POLYURETHANE VARNISH 2113 for outdoor use.

Note: For application on concrete floors with moisture problems, use STEAM BARRIER 1331 SD as a primer.

IMPLEMENTATION PROCESS

ENVIRONMENTAL CONDITIONS

Application temperature: 10°C to 30°C.

Maximum 80% relative humidity.

Do not apply if rain is expected or at hours of maximum sunlight.

The substrate and ambient temperature must be at least 3°C above the dew point during application to avoid condensation.

PREPARATION OF THE SUBSTRATE

The surface must be clean, compact, dry, free of dust or salts, free of efflorescence, free of loose or poorly adhering parts and free of any grease, oil or contamination that could interfere with the adhesion of the system.

The surface must be prepared with specialised machinery: milling, sanding or diamond grinding machines, depending on the condition of the substrate. Subsequently, the surface must be thoroughly brushed and vacuumed. The sanding or shot blasting process must leave a surface with sufficient porosity for the paint to anchor.

Materials in poor condition must be completely removed and cracks and areas in poor condition must be repaired until a sound, dry and clean substrate is obtained. Expansion joints must be respected and properly sealed with elastomeric material.

If necessary, use levelling or repair mortars to level the surface.

SUPPORT CONDITIONS

Dry substrate with humidity < 4 % with CM meter.

There shall be no rising damp measured by the polyethylene film method (ASTM E1907).

Concrete substrates must have a compressive strength above 25 N/mm² and a tensile strength above 1.5 N/mm².

Allow cement mortars to set completely (28 days minimum).

PRODUCT PREPARATION

Stir with low speed mechanical means (300-400 RPM), until a good homogenisation of the product and its catalyst is achieved. Mix component A, add component B while stirring and keep stirring for 3 minutes. To ensure consistency, reintroduce part of the mixture into the can of component B, homogenise, reintroduce back into the mixing container and homogenise again.

If it is necessary to mix with quartz sand, the sand can be mixed on top of component A and then component B can be added. You can also mix components A and B and add the sand on top of the mixture, which makes the incorporation of the sand easier but loses some of the pot life of the mixture. Stir at low speed to avoid incorporation of air.

The mixing life time should be taken into account in order not to prepare more product than can be used in that time. Once the mixing life has been exceeded, the product loses its properties and must be discarded. Partial mixing by weight or volume is not recommended.

Stir again periodically to homogenise the fillers.

PRODUCT APPLICATION

Depending on the thickness to be applied, different application methods can be used. The formation of a continuous, pore-free coats should be ensured by applying two coats or by increasing the thickness per coat if necessary. For medium to high thickness applications, it is recommended to pass a spiked roller in cross directions to remove air.

The minimum and maximum recoating times for all products to be used must be observed. Otherwise, sanding and repainting will be necessary.

Paint: For a smooth thin coat finish it can be applied by brush, short nap roller, rubber lip or airless spray gun with nozzle suitable for high viscosity products. For anti-skid thin coat finish, mix with appropriate sand ratio and apply with short nap roller in two directions.

Self-levelling: To make a thick layer self-levelling product, after mixing with the appropriate amount of aggregate, it can be applied by pouring, using a notched trowel to spread the product and de-aerating with a spiked roller. The thickness of the self-levelling product is controlled by the size of the notched trowel.

Multi-coat: After applying the appropriate primer, 0.6 mm quartz sand is sprinkled on the surface to saturation while the product is wet. Once the first layer has hardened, any aggregate that is not well adhered is swept up and vacuumed. For the next layer, a self-levelling mixture is prepared with the appropriate amount of aggregate and applied by pouring, spreading with a smooth trowel or rubber lip over the sand. While this second layer is wet, it is sprinkled again with 0.6 mm quartz sand to saturation. Once the second layer has hardened, any aggregate that is not well bonded is swept up and vacuumed. This process can be repeated until the desired thickness is achieved. Finally, the sand-covered surface is sealed with a product without aggregate, applied by spilling and spreading with a rubber lip. The application can be finished with a short nap roller to eliminate imperfections.

The applied product must be protected from moisture and condensation for at least 24 hours.

TOOL CLEANING

The utensils used must be cleaned with solvent immediately after use.

Suitable solvents: EPOXY SOLVENT 370, INDUSTRIAL EPOXY SOLVENT 375, UNIVERSAL SOLVENT 302

ADDITIONAL INFORMATION**HEALTH AND SAFETY**

For any information concerning safety issues in the use, storage, transport and disposal of this product, users should consult the labelling and the most recent version of the product's MSDS, which contains the safety, ecological and toxicological information on the product.

If the shelf life of the product is exceeded, an exothermic reaction takes place which produces heat. The more product is left in the container, the more heat is generated. If the temperature of the container rises or fumes are generated, place in a cool, well-ventilated place, ensuring thermal protection of the hands and holding the container by the handle.

Material Safety Data Sheet: MSDS-329

LER CODE: 08 01 11*.

WASTE: HAZARDOUS

TARIFF HEADING

TARIC code: 3907 30 00

STORAGE CONDITIONS

The storage should be in a cool and dry place (between 5 and 30°C), in its original containers, well closed and not deteriorated, protected from frost and direct sunlight. The stability of the product in its original unopened containers, at ambient temperatures not higher than 30°C and not lower than 5°C shall be 12 months from the date of manufacture.

LEGAL NOTICE

The technical information given in this document as well as the recommendations concerning the application and use of the product are given in good faith, with data based on current knowledge of the product, laboratory tests and practical use under normal conditions of storage, handling and application. The complete reproducibility of the data given for each individual use is not guaranteed. The user of the product must test the suitability of the product according to the end use of the product. Users must know and use the most recent version of the technical and safety data sheets of the product.